

## SOLENOID VALVE DETAILS

### Valve Model #W5B19-000-02

Pipe Size: **3/4"**

Orifice Size: **3/4"**

Flow Factor: **9.80 Cv**

Power: **8 watts**

Minimum Operating Pressure: **2 psi**

Maximum Operating Pressure: **230 psi**

Voltage/Current: **120 V AC**


### Valve Sealing Material

Sealing Material: **NBR**

Temperature: **14–195°F**

Medium Examples: **Air, Inert gas, Water**

## 3/4" SOLENOID VALVE

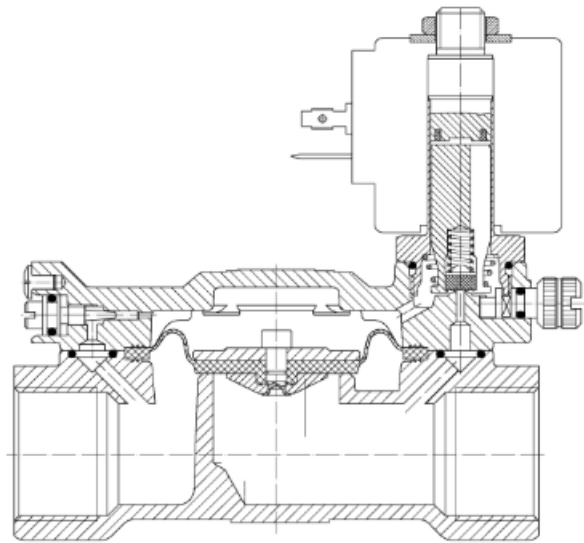

## SOLENOID VALVE DETAILS

### Valve Model #W5B19-000-02

Pipe Size: **3/4"**

Orifice Size: **3/4"**

Flow Factor: **9.80 Cv**

Power: **8 watts**

Minimum Operating Pressure: **2 psi**

Maximum Operating Pressure: **230 psi**


Voltage/Current: **120 V AC**

### Valve Sealing Material

Sealing Material: **NBR**

Temperature: **14–195°F**

Medium Examples: **Air, Inert gas, Water**

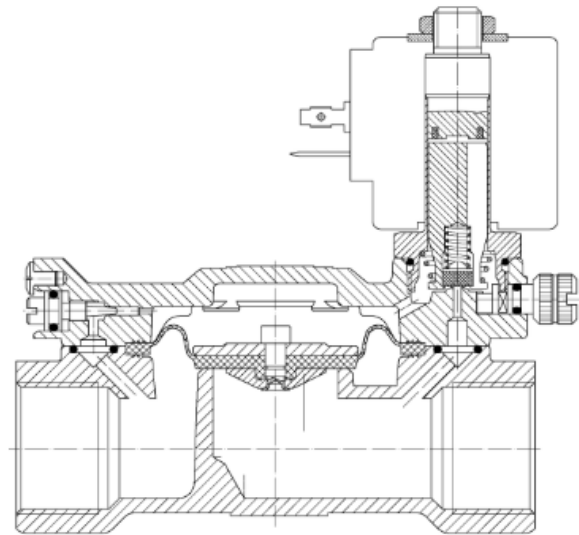

## VALVE MODEL SPECIFICATIONS

### Materials of Construction

Body: **Brass**

Armature Tube: **Stainless Steel 300**

Fixed Core: **Stainless Steel 400**

Plunger: **Stainless Steel 400**

Spring: **Stainless Steel 300**

Shading Ring: **Copper**

Orifice: **Brass**

Pipe Threading: **NPT**

### Electrical Connection

Rating: **NEMA 4**

Inrush VA: **25.0**

Holding VA: **14.5**

Connector: **Cable grip DIN**